
button.



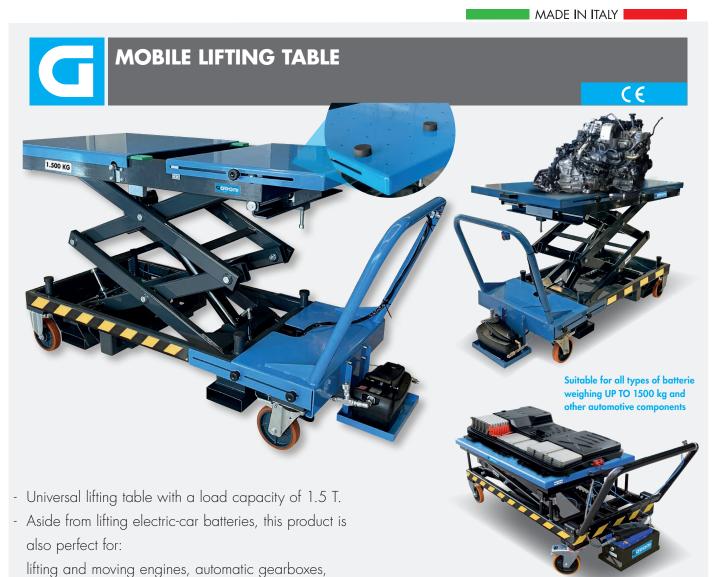

THETOOLMAKER.COM

- It is powered by compressed air.


chassis components

- It allows convenient battery installation or removal, thanks to the sliding cover that can be opened.
- Its high ground clearance makes it compatible with all workshop cranes on the market.
- It is easy to operate and tilt with selfexplanatory operations.
- The top table is extendable and tiltable by means of a mechanical screw, it also has holes with M10 thread, on which all types of supports or accessories can be mounted: special hooks, special brackets, plastic caps, protective mats for battery packs.

The table only lowers when The rack safety system is also useful for any maintenance. the operator presses the

When the table is not being operated, it locks automatically by means of a mechanical anti-lowering safety wedge









CE approval for the unit documents the unit's conformity with 2006/42/EC (machinery directive)

MADE IN ITALY



MADE IN ITALY

BATTERIES

TECHNICAL SPECIFICATIONS			
MODELS	GO1000B	GO1500B	GO1500T
OPENING TABLE	√1/3 420mm		
EXTENDABLE TABLE		√ 200mm	√ 200mm
TILTING TABLE	✓ _{±3°}	√ ±3°	√ ±3°
SHIFTING TABLE			√ ±30mm
EXTENDABLE HANDLE			√ 225mm
FORK HOUSING		✓	✓
MAX CAPACITY	1000 KG	1500 KG	1500 KG
TIME TO GO UP	80 s (no load) / 100 s (full load)	80 s (no load) / 150 s (full load)	80 s (no load) / 150 s (full load)
TIME TO GO DOWN	60 s (no load) / 20 s (full load)	70 s (no load) / 15 s (full load)	70 s (no load) / 15 s (full load)
POWER SUPPLY	6/8 bar	6/8 bar	6/8 bar













